


TWF60 R/S

Outline

TWF60-RS is a double-sided adhesive sheet with a PET base material that is removable adhesive on one side and strong adhesive on the other.

Structure

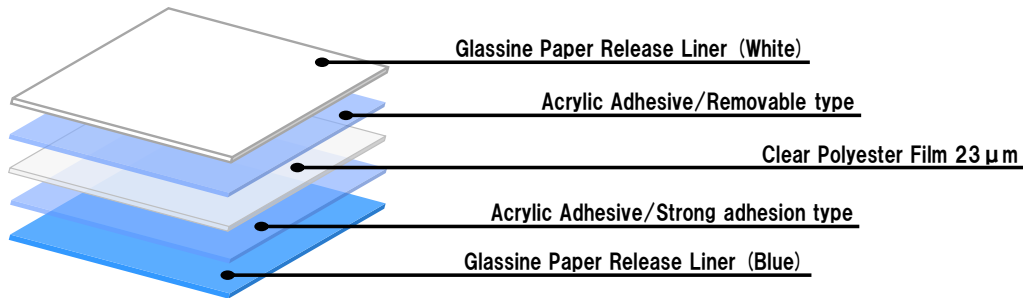

Product Name	Tape Thickness (μm)	Base film (μm)
TWF60 R/S	60	23

Properties

			Measured value		Test method
			Removable type side	Strong adhesion type side	
Adhesive Strength (N/25mm)	SUS (Polished with #360)	20min.	2.2	12.8	•JIS Z1528 •180° Peel •Peel Speed 300mm/min •23°C・50%RH •Lining material: PET#25
		24Hrs.	2.6	16.6	
	PET	20min.	3.2	12.8	
		24Hrs.	3.5	13.2	
Holding Power (mm/50000sec)			Non creep	Non creep	•40°C・Load 1kg ・25mm×25mm •Substrate:Stainless steel (Polished with # 360)
Ball Tack (No.)			7	4	•J.DOW Method (23°C)

Notices

Attach after wiping off oily, dusty and moisture substances on the surface of the adherend you may use.

Give an enough pressure when attaching, under the temperature condition over 10°C as possible.

Store it in a cool, dark place away from direct sunlight.

These data are representative so as not to guarantee for your conditions,nor do they for the wide range of each application described in this technical information.

Examining the compatibility of the adherend material with our product in advance, make a decision of starting to use.

Such as know-hows contained in this document, trade secrets, copyrights, and patents,each of all intellectual property's rights belongs only to our company.

Any copies, reprints, reproductions and disclosing any part of this document to a third party are prohibited without our prior approval.

All information and data in here should be used as a guide.

They do not constitute a warranty of any kind by NEION Film Coatings Corp.